COMAX® ORDER

Email technical@comax-uk.co.uk

COMAX® UK
A BETOMAX® Company
Unit 9A R-evolution | Telford Way | S60 5GP Rotherham

☒ Enquiry ☐ Order

Date | Project reference | Delivery date

Customer no. | Company | Delivery address | Town / Post code

Address | Town / Post code | Contact person | Mobile

bwolf
Contact person | Email | Email

Tel. | Fax | Tel. | Fax

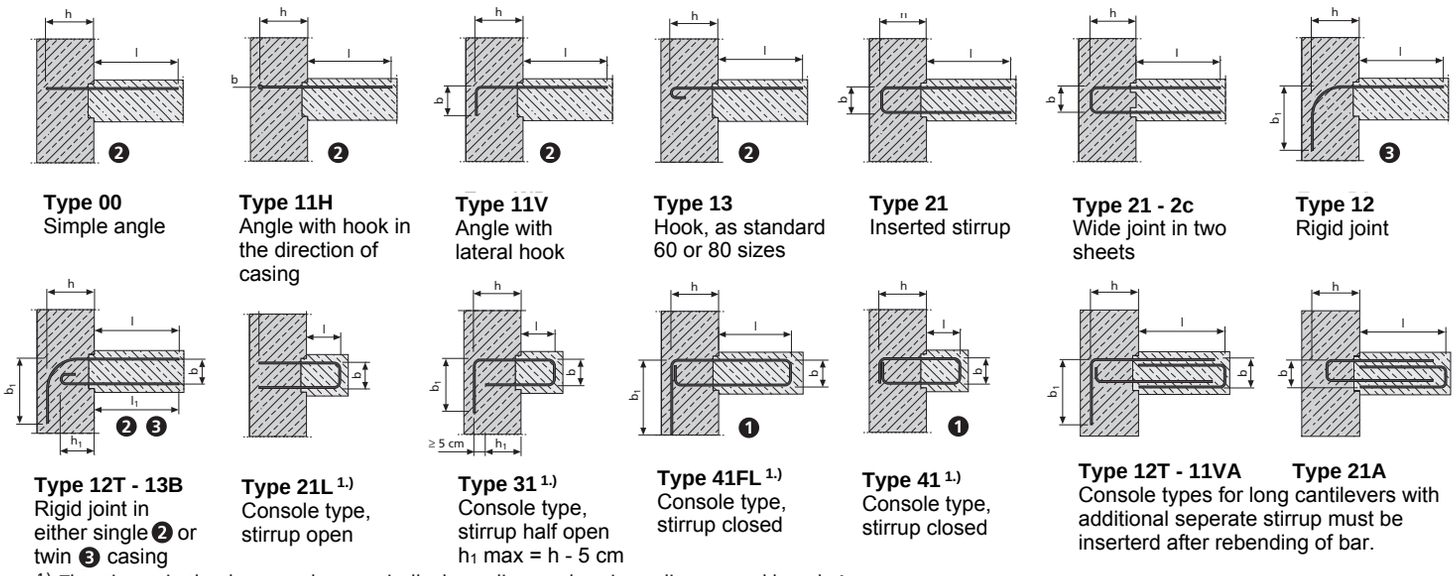

Type 00
Simple angle

Type 11H
Angle with hook in the direction of casing

Type 11V
Angle with lateral hook

Type 13
Hook, as standard 60 or 80 sizes

Type 21
Inserted stirrup

Type 21 - 2c
Wide joint in two sheets

Type 12
Rigid joint

Type 12T - 13B
Rigid joint in either single ❷ or twin ❸ casing

Type 21L [1.)]
Console type, stirrup open

Type 31 [1.)]
Console type, stirrup half open
h_1 max = h - 5 cm

Type 41FL [1.)]
Console type, stirrup closed

Type 41 [1.)]
Console type, stirrup closed

Type 12T - 11VA **Type 21A**
Console types for long cantilevers with additional seperate stirrup must be inserterd after rebending of bar.

[1.)] The stirrups in the sheet are bent conically depending on the stirrup distance and length **L** .

COMAX® reinforcement joints

❶ COMAX® CC double row in standard stirrup widths:
b = 90, 120, 140, 170, 200 and 220 mm

❷ Double-shear as double angle (hook) also available in different steel diameters

❸ Type 12 with bending roll diameter 10 ds

❹ Element width B (nominal value)
COMAX® CC and COMAX® X:
COMAX® CC: B = 60, 80, 110, 140, 160, 190, 220, 240 mm
COMAX® X: B = 110, 140, 160, 190, 220, 240 mm

❺ Stirrup spacing e
COMAX® CC and COMAX® X:
e = 10, 15, 20, 25, 30 cm
Special types for COMAX® CC with e = variable

❻ Element length L
COMAX® CC and COMAX® X: Stock items with L = 0.80 and 1.20 m
Special types for COMAX® CC any up to L = 2.50 m

❼ Stirrup width b
COMAX® CC and COMAX® X:
b = nominal metal sheet width (B) - 20 mm
Special holes for all types of COMAX ® CC upon request

Item	Quantity	Element width (mm) ❹	Box type (P, Q, L)	Bar Ø 8,10,12	Stirrup spacing e (cm) ❺	Stirrup type (see above)	Element length (mm) ❻	Stirrup width b (cm) ❼	Stirrup height h (cm)	Anchoring length l (cm)	Anchoring length l_1 (cm)	Height h_1 (cm)	Width b_1 (cm)

Subject to version / technical changes, errors excepted. 07.2026

Save | Print | Send | Further options see also menu (top right) | set default

COMAX® ORDER

Email technical@comax-uk.co.uk

COMAX® UK
A BETOMAX® Company
Unit 9A R-evolution | Telford Way | S60 5GP Rotherham

Date	Customer no.	Contact person	Tel.	Email
17.07.2026				

Item	Quantity	Element width (mm) ❹	Box type (P, Q, L)	Bar Ø 8,10,12	Stirrup spacing e (cm) ❺	Stirrup type (see above)	Element length (mm) ❻	Stirrup width b (cm) ❼	Stirrup height h (cm)	Anchoring length l (cm)	Anchoring length l_1 (cm)	Height h_1 (cm)	Width b_1 (cm)

Place / date	Name / Signature	Company stamp

Subject to version / technical changes, errors excepted. 07.2026

Save Print Send Further options see also menu (top right)

set default